

# STEM CAP MALE OR FEMALE for penstock valve DN 100 - 1000

05.210




## Product description

- Stem cap male or female for penstock valve

## Features

- Stems caps in ductile iron (EN-GJS-500-7) with epoxy paint coating for penstock valve
- Available two models: male and female
- Consult our technical services for other dimension.

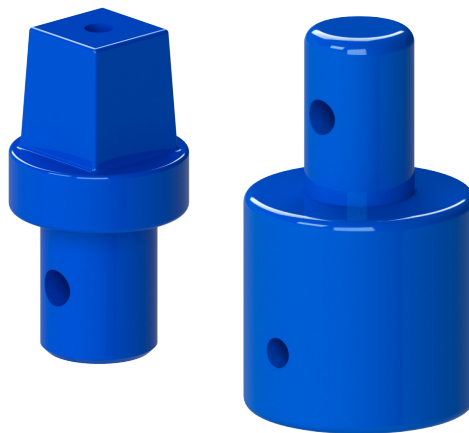

**Fucoli-Somepal**  
FUNDIÇÃO DE FERRO, S.A.


Visit our website at [www.fucoli-somepal.pt](http://www.fucoli-somepal.pt)

**Head office:** Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198


**Branch office:** Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | [comercial@fucoli-somepal.pt](mailto:comercial@fucoli-somepal.pt)

# STEM CAP MALE OR FEMALE for penstock valve DN 100 - 1000

05.210

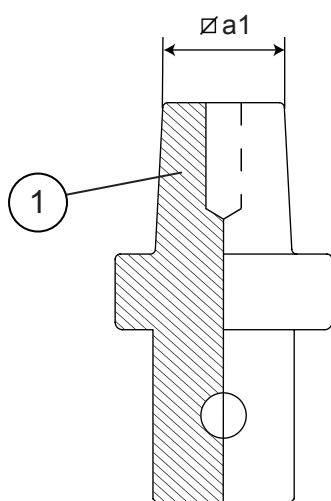

Stem cap  
male

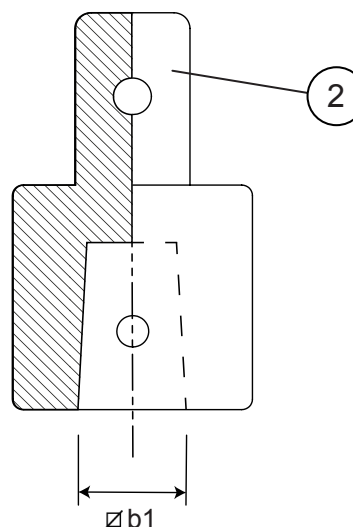

Stem cap  
female

## Component list

| pos. | components      | material                  | standard |
|------|-----------------|---------------------------|----------|
| 1    | Stem cap male   | Ductile iron EN-GJS-500-7 | EN 1563  |
| 2    | Stem cap female | Ductile iron EN-GJS-500-7 | EN 1563  |

## Reference and dimensions

| DN   | code<br>stem cap male | Ø a1<br>mm | Kg<br>approx. | code<br>stem cap female | Ø a1<br>mm | Kg<br>approx. |
|------|-----------------------|------------|---------------|-------------------------|------------|---------------|
| 100  | 10707410              | 19         | 0.3           | 10708100                | 17         | 1             |
| 150  | 10707100              | 19         | 1             | 10708120                | 19         | 1             |
| 200  | 10707200              | 24         | 1             | 10708200                | 24         | 1             |
| 250  | 10707200              | 24         | 1             | 10708200                | 24         | 1             |
| 300  | 10707205              | 27         | 2             | 10708205                | 27         | 2             |
| 350  | 10707205              | 27         | 2             | 10708205                | 27         | 2             |
| 400  | 10707250              | 32         | 3             | 10708210                | 32         | 4             |
| 450  | 10707250              | 32         | 3             | 10708210                | 32         | 4             |
| 500  | 10707250              | 32         | 3             | 10708210                | 32         | 4             |
| 600  | 10707270              | 32         | 3             | 10708210                | 32         | 4             |
| 700  | 10707304              | 41         | 8             | 10707228                | 41         | 8             |
| 800  | 10707304              | 41         | 8             | 10707228                | 41         | 8             |
| 900  | 10707304              | 41         | 8             | 10707228                | 41         | 8             |
| 1000 | 10707305              | 46         | 9             | 10707240                | 46         | 9             |



**Fucoli-Somepal**  
FUNDIÇÃO DE FERRO, S.R.L.

Visit our website at [www.fucoli-somepal.pt](http://www.fucoli-somepal.pt)

Head office: Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198

Branch office: Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | [comercial@fucoli-somepal.pt](mailto:comercial@fucoli-somepal.pt)

