

## DOUBE SOCKET 90° BEND FOR uPVC

Fittings for uPVC pipes

63 - 400 PN10/16/25

10.100



### Product description

- Double socket 90° bend for uPVC pipes for drinking water and neutral liquids
- Service temperature from 0°C (excluding frost) to 70°C

### Standards

- Designed according to EN 12842
- For uPVC pipes according EN ISO 1452-2

### Corrosion protection

- Epoxy powder coating RAL 5005
- Applied internal and external with a minimum coating thickness of 250 µm
- Potable water approved epoxy coating fusion bonded according EN 14901 and GSK (RAL-GZ662) guidelines

### Approvals

- ACS Potability Certificate 21 ACC NY 004

### Features

- Fitting approved for drinking water for uPVC pipes connection
- Body in ductile cast iron (EN-GJS-500-7)
- Fast and easy to install
- Socket ends with drinking water approved EPDM double lip seal ring to ensure a perfect sealing
- Maximum working pressure 25 bar, the maximum working and test pressure must be in accordance with the pipe standard
- This fitting does not guarantee the pipe blocking, they must be anchored by other means
- On request possibility of sealing ring in NBR.



**Fucoli Somepal**  
FUNDAÇÃO DE FERRO, S. A.

Visit our website at [www.fucoli-somepal.pt](http://www.fucoli-somepal.pt)


**Head office:** Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198

**Branch office:** Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | [comercial@fucoli-somepal.pt](mailto:comercial@fucoli-somepal.pt)

# DOUBE SOCKET 90° BEND FOR uPVC

Fittings for uPVC pipes  
63 - 400 PN10/16/25

10.100

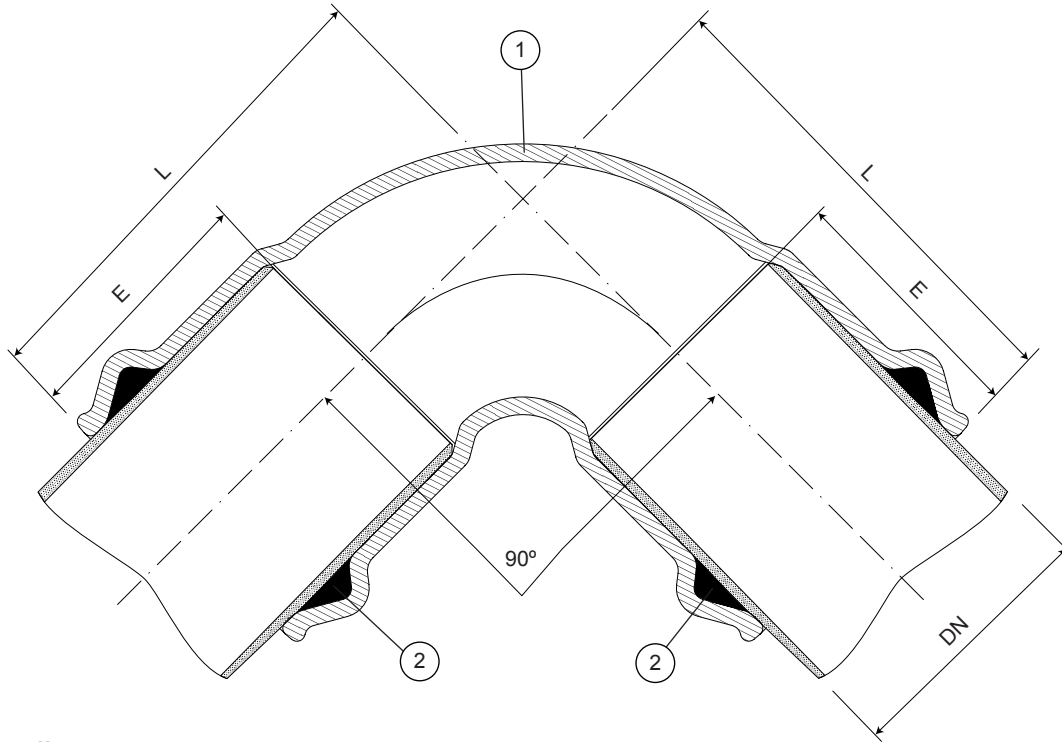

## Component list

pos.	components	material	standard
1	Body	Ductile iron EN-GJS-500-7	EN 1563
2	Sealing ring	Elastomer EPDM	EN 681 - 1

## Reference and dimensions

$\varnothing D$ ext. PE/uPVC	code	L mm	E mm	Kg approx.
63	1041900001	158	88	4
75	1041901001	166	90	4
90	1041902001	185	97	6
110	1041903001	203	105	9
125	1041904001	230	108	9
140	1041905001	244	110	11
160	1041906001	274	123	16
180	1041906501	290	128	20
200	1041907001	320	132	23
225	1041907501	355	135	27
250	1041908001	388	145	33
315	1041909001	463	160	57
400	1041909501	550	173	98



**Fucoli Somepal**  
FUNDAÇÃO DE FERRO, S.A.

Visit our website at [www.fucoli-somepal.pt](http://www.fucoli-somepal.pt)

Head office: Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198

Branch office: Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | [comercial@fucoli-somepal.pt](mailto:comercial@fucoli-somepal.pt)

