

# RECESSED ROUND MANHOLE COVER

## SERIES FUCOLI

### B125, C250 and D400

12.500



#### Product description

- Recessed round manhole cover series FUCOLI
- Water based black painting

#### Installation location

- Class B125 - Footways, pedestrian areas and comparable areas, car parks or car parking decks
- Class C250 - For gully tops, installed in the area of kerbside channels of roads which when measured from the kerb edge, extends a maximum of 0,5 m into the carriageway and a maximum of 0,2 m into the pedestrian area
- Class D400 - Carriageways of roads (including pedestrian streets), hard shoulders and parking areas for all types of road vehicles

#### Standards

- Designed according to EN 124-1/2

#### Features

- Ductile cast iron cover and frame (EN-GJS-500-7) with water based black painting
- With hydraulic sealing to prevent the odours
- Allow a block paving infill, in this way dissimulate the manhole cover presence fitting it with the involving space
- Model used in historical and pedestrian areas.



**Fucoli-Somepal**  
FUNDIÇÃO DE FERRO, S.A.

Visit our website at [www.fucoli-somepal.pt](http://www.fucoli-somepal.pt)

**Head office:** Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198


**Branch office:** Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | [comercial@fucoli-somepal.pt](mailto:comercial@fucoli-somepal.pt)

# RECESSED ROUND MANHOLE COVER

## SERIES FUCOLI

### B125, C250 and D400

12.500

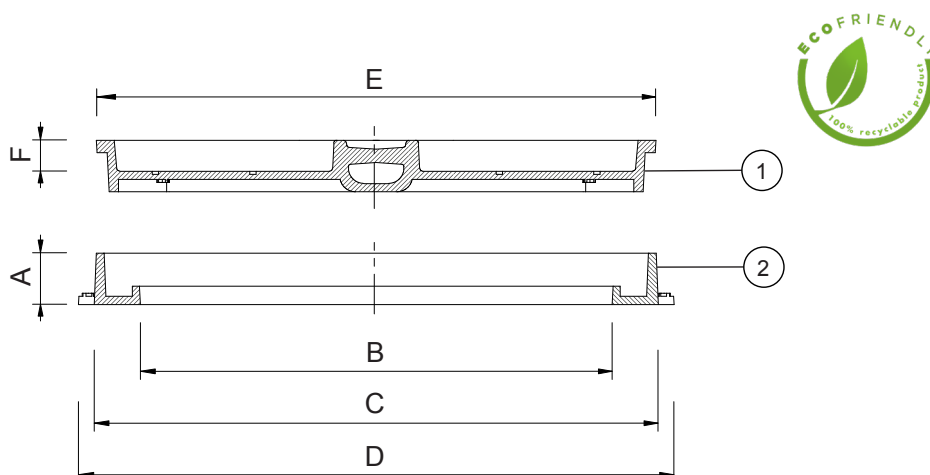

### Component list

pos.	components	material	standard
1	Cover	Ductile iron EN-GJS-500-7	EN 1563
2	Frame	Ductile iron EN-GJS-500-7	EN 1563

### Reference and dimensions

Model - DN - Class	code	Frame				Cover		hydraulic sealing Y / N	Weight	
		height mm	clear opening mm	Ø external mm	Ø ext. with stone-bolt mm	Ø external mm	recessed height mm		Cover kg	Total kg
		A	B	C	D	E	F		approx.	approx.
Fucoli 500 - C250	24B3BY3FNDAZZZZ00AA	50	460	580	580	545	30	Y	21	32
Fucoli 600 - B125	24B4CI2FNFAZZZZ00AA	75	600	720	720	686	50	Y	27	45
Fucoli 600 - D400	24B4CI4FNFAZZZZ00AA	75	600	720	720	686	50	Y	43	61



**Fucoli-Somepal**  
FUNDIÇÃO DE FERRO, S.R.L.

Visit our website at [www.fucoli-somepal.pt](http://www.fucoli-somepal.pt)

**Head office:** Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198

**Branch office:** Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | [comercial@fucoli-somepal.pt](mailto:comercial@fucoli-somepal.pt)



100% MADE IN EUROPE

All drawings, technical data, dimensions and weights are not binding. Subject to change. The components may be replaced by equivalent or higher materials without prior notice.

Ed.8 Rev. 1