

RECTANGULAR MANHOLE COVER

SERIES TELECOM

B125 and D400

12.400



Product description

- Rectangular manhole cover series TELECOM
- Water based black painting

Installation location


- Class B125 - Footways, pedestrian areas and comparable areas, car parks or car parking decks
- Class D400 - Carriageways of roads (including pedestrian streets), hard shoulders and parking areas for all types of road vehicles

Standards

- Performance according to EN 124-1/2

Features

- Ductile cast iron cover (EN-GJS-500-7) with water based black painting and steel zinc frame
- Cover with non-slip raised pattern according to EN 124-1 designed to allow quick and easy installation
- Cover with two lifting points for easy operation/handling
- Steel zinc frame
- Characterized for its great dimensions and the modularity, in such a way that the same cover can be used in five distinct frames
- This model is used in situations where is necessary an large access zones to do interventions
- Available in 5 models:
 - A. 807 x 607 model consisting of 1 cover + frame
 - B. 1210 x 807 model consisting of 2 covers + frame
 - C. 1638 x 649 model consisting of 2 covers + frame
 - D. 1800 x 807 model consisting of 3 covers + frame
 - E. 2400 x 807 model consisting of 4 covers + frame
- Personalization of the cover with inscriptions and logo in high relief with minimal quantities
- On request hot dip galvanized frame.

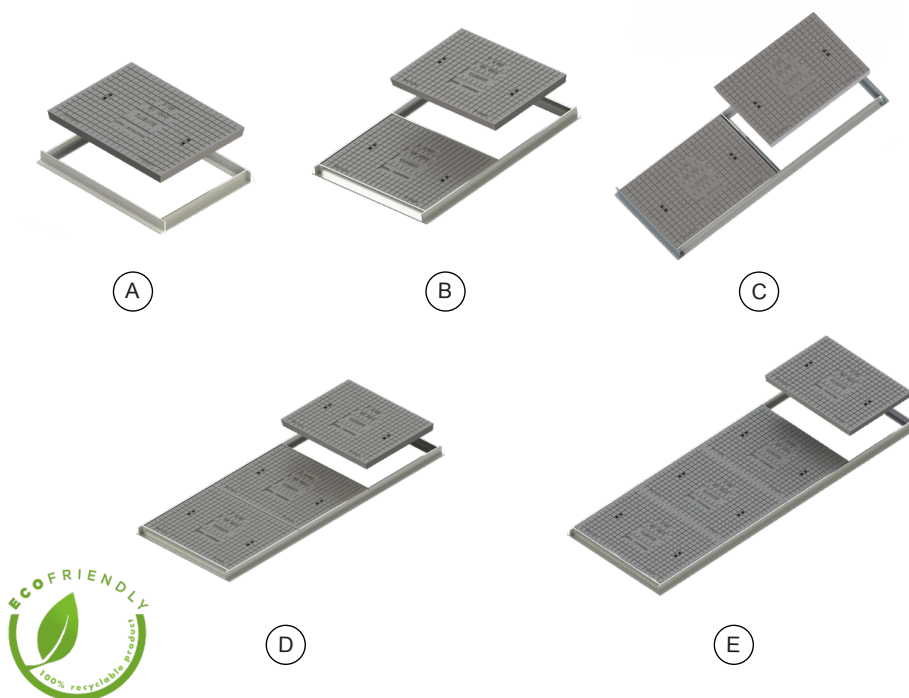

Fucoli-Somepal
FUNDAÇÃO DE FERRO, S. A.

Visit our website at www.fucoli-somepal.pt

Head office: Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198



Branch office: Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | comercial@fucoli-somepal.pt

RECTANGULAR MANHOLE COVER SERIES TELECOM B125 and D400

12.400



Five models available

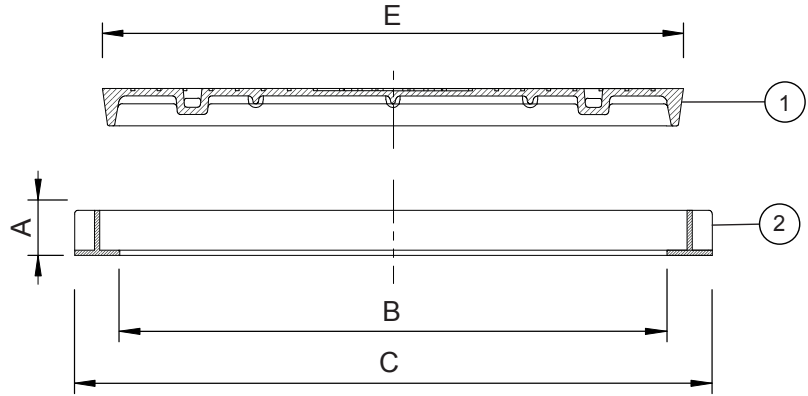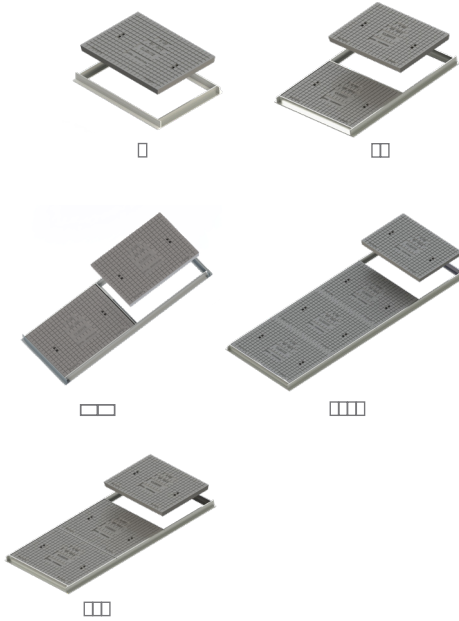

Component list

pos.	components	material	standard
1	Cover	Ductile iron EN-GJS-500-7	EN 1563
2	Frame	Steel zinc	-

Reference and dimensions

Model - Class	code	Frame			Cover	Weight	
		height mm A	clear opening mm B	ext. with stone-bolt mm C	external mm E	Cover kg approx.	Total kg approx.
TL1 807 x 607 - B125	24D1DA2TNEBZZZZ00AA	60	729 x 529	849 x 649	776 x 576	39	56
TL1 807 x 607 - D400	24D1DA4TNEBZZZZ00AA	60	729 x 529	849 x 649	776 x 576	71	88
TL2 1210 x 807 - B125	24D1EM2TNEFZZZZ00AA	60	1118 x 729	1238 x 849	(2) 776 x 576	(2) 39	107
TL2 1210 x 807 - D400	24D1EM4TNEFZZZZ00AA	60	1118 x 729	1238 x 849	(2) 776 x 576	(2) 71	172
TL2L 1638 x 649 - B125	24D1GA2TNEFZZZZ00AA	60	1518 x 529	1638 x 649	(2) 776 x 576	(2) 39	107
TL2L 1638 x 649 - D400	24D1GA4TNEFZZZZ00AA	60	1518 x 529	1638 x 649	(2) 776 x 576	(2) 71	172
TL3 1800 x 807 - B125	24D1GR2TNEFZZZZ00AA	60	1707 x 729	1827 x 849	(3) 776 x 576	(3) 39	158
TL3 1800 x 807 - D400	24D1GR4TNEFZZZZ00AA	60	1707 x 729	1827 x 849	(3) 776 x 576	(3) 71	256
TL4 2400 x 807 - B125	24D1IX2TNEFZZZZ00AA	60	2296 x 729	2416 x 849	(4) 776 x 576	(4) 39	210
TL4 2400 x 807 - D400	24D1IX4TNEFZZZZ00AA	60	2296 x 729	2416 x 849	(4) 776 x 576	(4) 71	340



Fucoli-Somepal
FUNDAÇÃO DE FERRO, S. R. L.

Visit our website at www.fucoli-somepal.pt

Head office: Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198

Branch office: Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | comercial@fucoli-somepal.pt

