

# “S” HEIGHT ADJUSTMENT BEND FLANGED DN 80 - 150 PN10/16

10.1400



## Product description

- “S” height adjustment bend flanged for drinking water and neutral liquids

## Standards

- Designed according to EN 545
- Flange drilling to EN 1092-2 PN10/16

## Corrosion protection

- Epoxy powder coating RAL 5005
- Applied internal and external with a minimum coating thickness of 250 µm
- Potable water approved epoxy coating fusion bonded according to EN 14901-1 and GSK (RAL-GZ662) guidelines

## Approvals

- ACS Potability Certificate 24 ACC NY 060

## Features

- Fitting approved for drinking water
- Body and flange in ductile cast iron EN-GJS-500-7
- Fast and easy to install
- Allows fire hydrants, valves or pipes to be mounted and deviated or compensated in a range of ± 0.5 m and between 0° to 360° about the principal pipe, so assuring the equipment is correctly installed
- On request possibility of PN25.



RAI GUTZEICHEN  
SCHWEISS-UND SCHROTTVERBÄNDE  
VON ANHÄNGERN UND FORMSTÜCKEN



**Fucoli-Somepal**  
FUNDAÇÃO DE FERRO, S. A.


Visit our website at [www.fucoli-somepal.pt](http://www.fucoli-somepal.pt)

**Head office:** Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100

**Branch office:** Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | [comercial@fucoli-somepal.pt](mailto:comercial@fucoli-somepal.pt)

# "S" HEIGHT ADJUSTMENT BEND FLANGED DN 80 - 150 PN10/16

10.1400

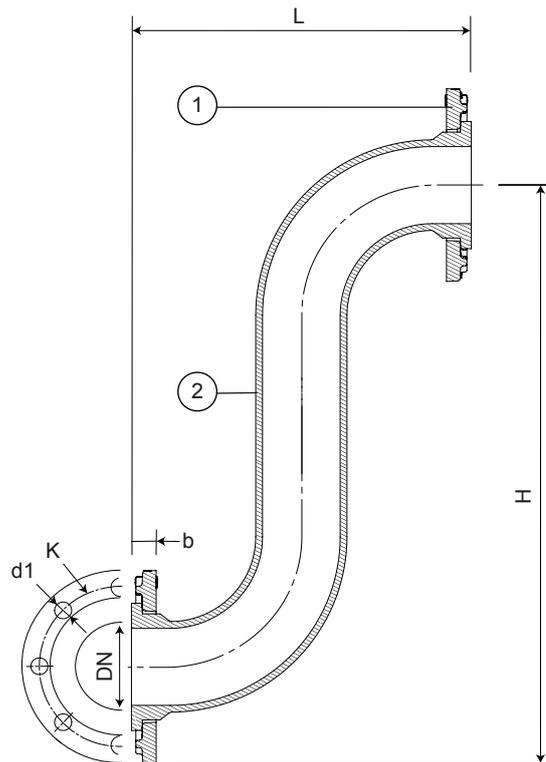

## Component list

pos	components	material	standard
1	Flange	Ductile iron EN-GJS-500-7	EN 1563
2	Body	Ductile iron EN-GJS-500-7	EN 1563

## Reference and dimensions

DN	PN	code	L	H	K	n° x d1	b	Kg
			mm	mm	mm	mm	mm	approx.
80	10/16	10005059	350	500	160	8 x 19	21	16
100	10/16	10005060	350	500	180	8 x 19	21	19
150	10/16	10005065	350	500	240	8 x 23	21	30