

FLANGED SOFT SEALING GATE VALVE S15 3000

with gearbox

DN 40 - 300 PN25

01.204GK



Product description

- Flanged soft sealing gate valve series 3000 with Auma multi-turn gearbox, for drinking water and neutral liquids
- Service temperature from 0°C (excluding frost) to 70°C

Standards

- Designed according to EN 1074 parte 1 & 2 and EN 1171
- Flange drilling to EN 1092-2 PN25
- Face-to-face according to EN 558 serie 15
- ISO top flange according to ISO 5210
- Auma multi-turn gearbox according to EN 15714-2

Tests

All valves are individually hydrostatically tested according to EN 1074-1/2 and EN 12266:

- Seal 1.1 x PN (in bar); Body: 1.5 x PN (in bar)

Corrosion protection

- Epoxy powder coating RAL 5005
- Applied internal and external with a minimum coating thickness of 250 µm
- Potable water approved epoxy coating, fusion bonded according DIN 3476-1, EN 14901-1 and GSK approved

Approvals

- ACS Potability Certificate 21 ACC NY 005
- GSK Epoxy Coating Certificate GSK-ID:1247 (RAL-GZ 662)

Features

- Isolation valve approved for drinking water
- Full bore
- The valves from DN 250 to DN 300 are equipped with an axial bearing to ensure reduced operating torque
- Stainless steel stem with rolled threads produced by cold rolling process, which keeps the steel structure and increase its mechanical resistance
- Stem sealing system with 4 O-rings in EPDM
- O-ring stem sealing exchangeable under pressure
- Wedge fully vulcanized with drinking water approved EPDM
- Top of the wedge conceived with "soft stop" system, which acts as an end stop for the fully open valve
- Wedge with brass nut fixed in the wedge core preventing vibration and ensure a long life span
- Wedge and body designed with "monorail" system
- Round EPDM bonnet gasket fixed in a recess, surrounding the bolts, ensuring a perfect seal
- Body/bonnet bolts in stainless steel A2 encased and sealed ensuring full corrosion protection
- Multi-turn Auma GK IP68
- On request possibility of stem in stainless steel AISI 316L, NBR sealings and wedge nut in different brass alloys.



Fucoli-Somepal
FUNDIÇÃO DE FERRO, S.A.

Visit our website at www.fucoli-somepal.pt


Head office: Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100

Branch office: Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | comercial@fucoli-somepal.pt

FLANGED SOFT SEALING GATE VALVE S14 3000

with gearbox
DN 40 - 300 PN25

01.204GK

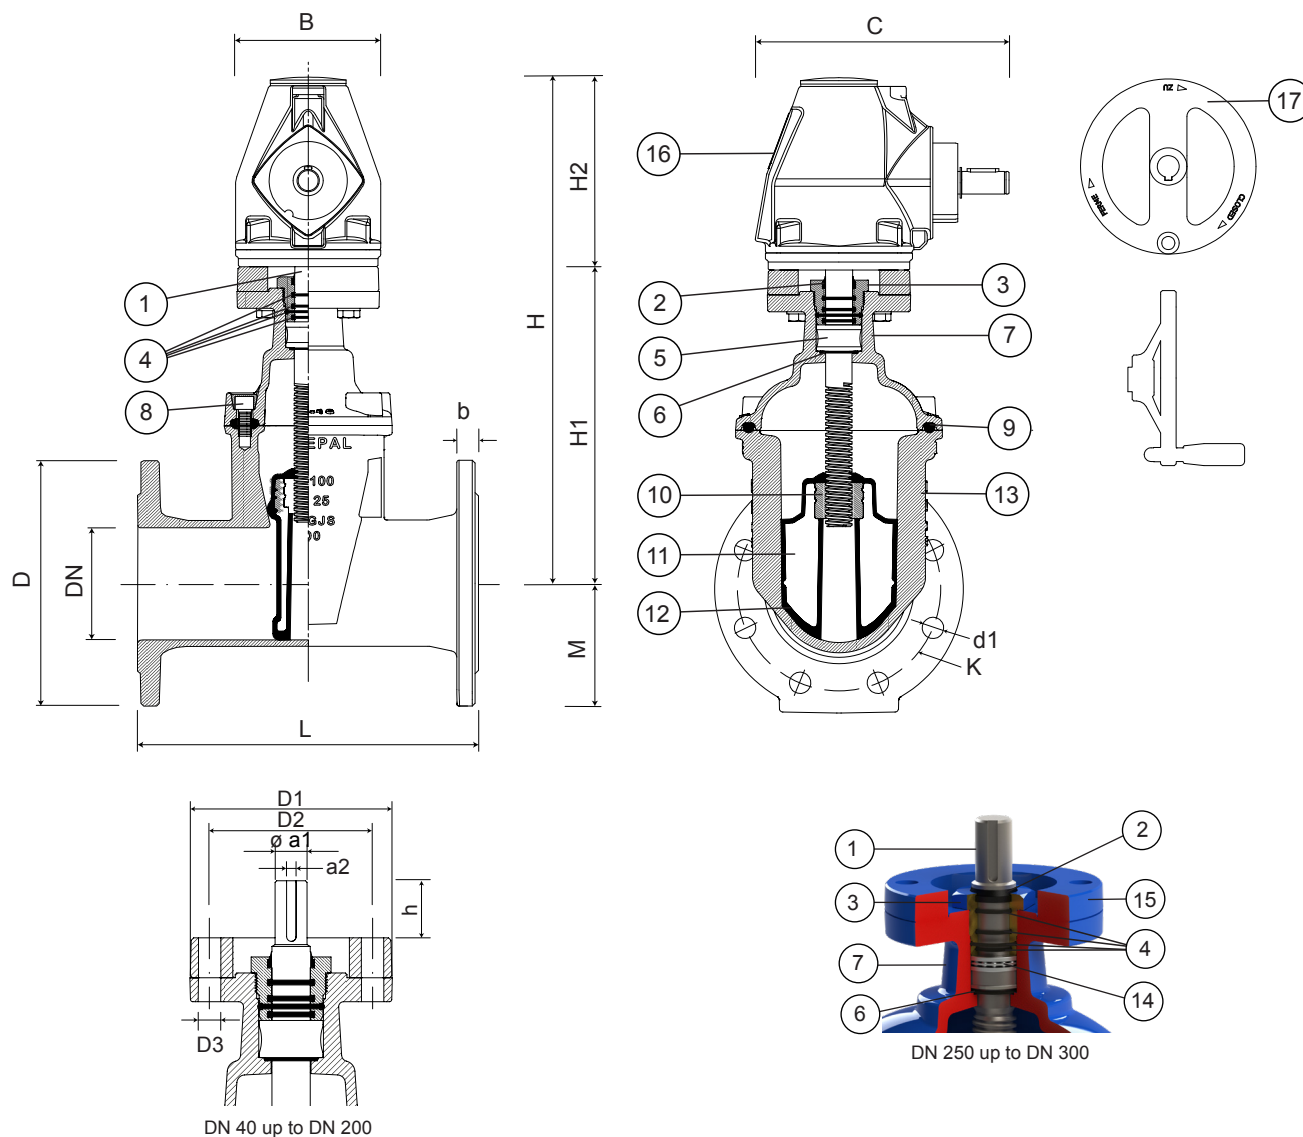

Component list

pos	components	material	standard
1	Stem	Stainless steel AISI 420	EN 10088-1
2	Clearing joint	Elastomer	-
3a	Gland	Brass DZR CW602N	EN 12164
4	O-rings	Elastomer EPDM	EN 681-1
5	Stem washer	Brass DZR CW602N	EN 12164
6	O-ring	Elastomer EPDM	EN 681-1
7	Bonnet	Ductile iron EN-GJS-500-7	EN 1563
8	Bolts	Stainless steel A2	EN 10088-1
9	Bonnet gasket	Elastomer EPDM	EN 681-1

pos	components	material	standard
10	Wedge nut	Brass DZR CW602N	EN 12164
11	Wedge	Ductile iron EN-GJS-500-7	EN 1563
12	Wedge covering	Elastomer EPDM	EN 681-1
13	Body	Ductile iron EN-GJS-500-7	EN 1563
14	Bearing	Steel	ISO 20516
15	Mounting flange	Ductile iron EN-GJS-500-7	EN 1563
16	Multi-turn gearbox	-	-
17	Handwheel	Printed steel ST W24	EN 10111 and 10130

continued on next page

FLANGED SOFT SEALING GATE VALVE S15 3000

with gearbox

DN 40 - 300 PN25

01.204GK



continued from previous page

Reference and dimensions

DN	PN	código	D mm	L mm	H mm	H1 mm	M mm	K mm	nº x d1 mm	b mm	ISO 5210 flange	AUMA gearbox	h mm	B mm	C mm	Ø D1 mm	H2 mm	Kg aprox.
40	25	10731010GK	150	240	347	177	75	110	4 x 19	19	F10	GK 10.2	30	130	105	160	170	20
50	25	10731020GK	165	250	378	208	83	125	4 x 19	19	F10	GK 10.2	30	130	105	160	170	22
60	25	10731030GK	175	270	387	217	88	135	8 x 19	19	F10	GK 10.2	33	130	105	160	170	27
65	25	10731040GK	185	270	387	217	93	145	8 x 19	19	F10	GK 10.2	33	130	105	160	170	27
80	25	10731050GK	200	280	425	253	100	160	8 x 19	19	F10	GK 10.2	33	130	105	160	170	31
100	25	10731060GK	235	300	456	286	110	190	8 x 23	19	F10	GK 10.2	39	130	105	200	170	36
125	25	10731070GK	270	325	493	323	125	220	8 x 28	19	F10	GK 10.2	39	130	105	200	170	44
150	25	10731080GK	300	350	572	384	143	250	8 x 28	20	F14	GK 14.2	41	180	105/123	315	188	63
200	25	10731090GK	360	400	647	459	180	310	12 x 28	22	F14	GK 14.2	46	180	105/123	315	188	84
250	25	10731100GK	425	450	733	545	213	370	12 x 31	24.5	F14	GK 14.2	50	180	105/123	315	188	114
300	25	10731110GK	485	500	803	615	243	430	16 x 31	27.5	F14	GK 14.2	50	180	105/123	315	188	184

AUMA gearbox	ISO 5210 flange	B mm	C mm	D1 mm	D2 mm	nº x D3 mm	ø a1 mm	ø a2 mm	ø hanwheel
GK 10.2	F10	130	105	125	102	4 x 12	20	6	200 315
GK 14.2	F14	180	105/123	175	140	4 x 18	30	8	200 315

For more information on the Auma multi-turn gearbox consult the manufacturer's technical documentation.