

DOUBLE SOCKET TEE FOR uPVC WITH THREADED BRANCH

11.1500

Fittings for uPVC pipes 63 - 400 PN16



Product description

- Double socket tee for uPVC pipes with threaded branch for waste water
- Service temperature from 0°C (excluding frost) to 70°C

Standards

- Designed according to EN 12842
- For uPVC pipes according EN ISO 1452-2

Corrosion protection

- Epoxy powder coating RAL 3011
- Applied internal and external with a minimum coating thickness of 250 µm
- Fusion bonded epoxy coating according EN 14901-1 and GSK (RAL-GZ662) guidelines

Features

- Fitting for waste water uPVC pipes connection
- Body in ductile cast iron (EN-GJS-500-7)
- Fast and easy to install
- Socket ends with NBR double lip seal ring to ensure a perfect sealing
- Maximum working pressure 16 bar, the maximum working and test pressure must be in accordance with the pipe standard
- This fitting does not guarantee the pipe blocking, they must be anchored by other means.



100% MADE IN EUROPE



Fucoli-Somepal
FUNDICÃO DE FERRO, S.A.

Visit our website at www.fucoli-somepal.pt

Head office: Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198


Branch office: Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | comercial@fucoli-somepal.pt

DOUBLE SOCKET TEE FOR uPVC WITH THREADED BRANCH

Fittings for uPVC pipes

63 - 400 PN16

11.1500

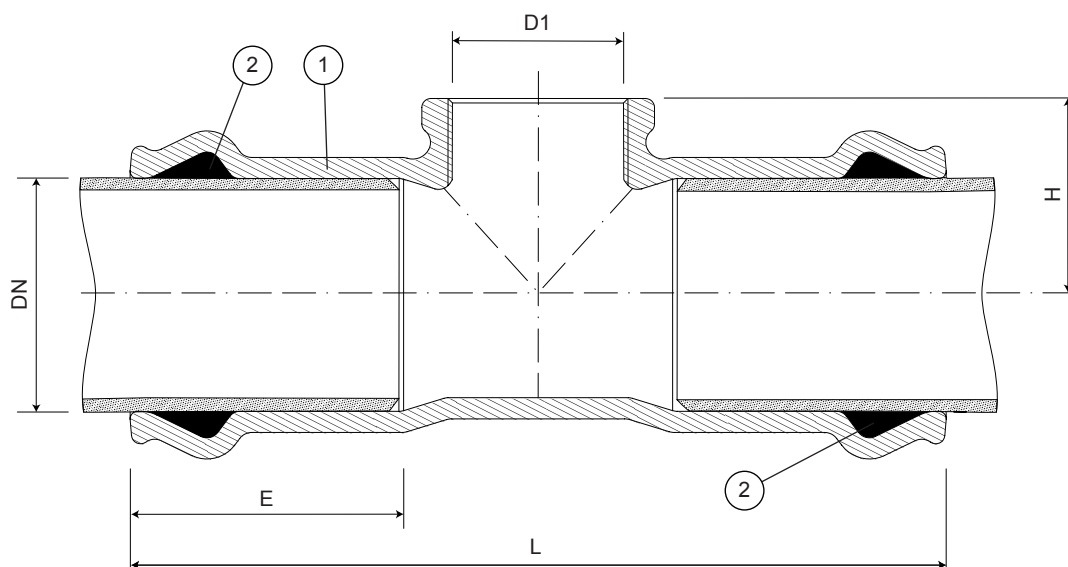

Component list

pos.	components	material	standard
1	Body	Ductile iron EN-GJS-500-7	EN 1563
2	Sealing ring	Elastomer NBR	EN 681 - 1

Reference and dimensions

ø D ext. PE/uPVC	D1 (BSP)	code	L mm	H mm	E mm	Kg approx.
63	G 1 1/2"	1045600301	258	59	88	4
63	G 2"	1046606201	258	59	88	4
75	G 1 1/2"	1045600201	270	64	90	4
75	G 2"	1045630501	270	64	90	4
90	G 1 1/2"	1045600101	291	81	97	6
90	G 2"	1045630701	291	81	97	6
90	G 2 1/2"	1045630801	306	81	97	6
110	G 1 1/2"	1045600501	315	90	105	7
110	G 2"	1045640701	315	90	105	7
110	G 2 1/2"	1045640801	330	90	105	8
125	G 1 1/2"	1045600401	332	97	108	8
125	G 2"	1045650701	332	97	108	8
140	G 1 1/2"	1045641201	340	104	110	10
140	G 2"	1045641001	340	104	110	10
160	G 1 1/2"	1045642201	370	113	123	12
160	G 2"	1045642001	370	113	123	12
200	G 1 1/2"	1045645201	410	145	132	16
200	G 2"	1045600701	410	145	132	17
250	G 1 1/2"	1045643201	462	166	145	24
250	G 2"	1045643001	462	166	145	24
315	G 2"	1045644001	516	195	160	38
400	G 1 1/2"	10456445002	562	245	173	60
400	G 2"	10456445001	562	245	173	60



Fucoli-Somepal
FUNDAÇÃO DE FERRO, S.R.L.

Visit our website at www.fucoli-somepal.pt

Head office: Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198

Branch office: Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | comercial@fucoli-somepal.pt



100% MADE IN EUROPE

All drawings, technical data, dimensions and weights are not binding. Subject to change. The components may be replaced by equivalent or higher materials without prior notice.

Ed.8 Rev. 2