

EXTENSION SPINDLE for soft sealing gate valve DN 20 - 600

05.300



Product description

- Extension spindle for soft sealing gate valve

Features

- Extension spindle is fixed to the valve through a split stainless steel
- All extension spindle are equipped with a 27 stem cap, allowing all soft sealing gate valves to be maneuvered using a single key adapter fits most standard T-keys, regardless of the diameter
- Stems caps and bottom adaptor in ductile iron (EN-GJS-500-7) with epoxy paint coating
- The bottom cover protects the valve spindle from sand and dirt and enables it to rotate freely
- Available with 650mm or 1000mm height, for other dimensions consult our technical services.



Fucoli-Somepal
FUNDIÇÃO DE FERRO, S.A.

Visit our website at www.fucoli-somepal.pt

Head office: Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198

Branch office: Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | comercial@fucoli-somepal.pt


EXTENSION SPINDLE for soft sealing gate valve DN 20 - 600

05.300



Component list

pos.	components	material	standard
1	Spindle cap	Ductile iron EN-GJS-500-7	EN 1563
2	Bolt	Steel zinc plated cl. 8.8	DIN 933
3	Top cover	PP	-
4	Protection tube	PP	-
5	Square bar	Zinc coated steel ST 37	EN 10025
6	Bottom connector	PP	-
7	Bottom cover	PP	-
8	Split	Stainless steel A2	EN 10088-1
9	Bottom adaptor	Ductile iron EN-GJS-500-7	EN 1563

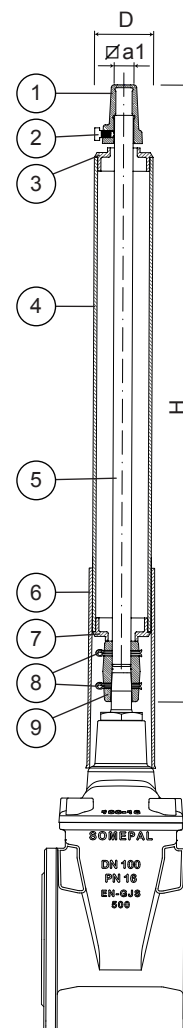

DN	code	H	D	Ø a1	Kg approx.
20 (3/4") / 25 (1") / 32 (1 1/4") / 40 (1 1/2") / 50 (2")	10703270	650	63	27	2
20 (3/4") / 25 (1") / 32 (1 1/4") / 40 (1 1/2") / 50 (2")	10703360	1000	63	27	3
40 / 50 / 63	10703252	650	63	27	2
40 / 50 / 63	10703365	1000	63	27	3
60 / 65 / 75 / 80 / 90	10703254	650	63	27	2
60 / 65 / 75 / 80 / 90	10703370	1000	63	27	3
100 / 110	10703258	650	63	27	3
100 / 110	10703375	1000	63	27	4
125 / 140 / 150 / 160	10703262	650	63	27	3
125 / 140 / 150 / 160	10703380	1000	63	27	5
200	10703264	650	63	27	5
200	10703385	1000	63	27	7
250 / 300 / 315	10703266	650	63	27	5
250 / 300 / 315	10703390	1000	63	27	7
350 / 400 / 450 / 500	10703275	650	63	27	6
350 / 400 / 450 / 500	10703395	1000	63	27	10
600	10703278	650	63	27	6
600	10703396	1000	63	27	10



Fucoli-Somepal
FUNDIÇÃO DE FERRO, S.R.L.

Visit our website at www.fucoli-somepal.pt

Head office: Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198

Branch office: Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | comercial@fucoli-somepal.pt



100% MADE IN EUROPE