

STAINLESS STEEL INSERT FOR PE PIPES 63 - 500

15.400



Product description

- Insert: stainless steel AISI304 for PE pipe

Features

- Stainless steel inserts are used to reinforce PE and uPVC pipes from the inside to allow the use of compression couplings
- The inserts are designed to reinforce pipe ends by providing inside support for PE or PVC pipes when pipe couplings or flange adaptors are used for the connection of these pipes
- The inserts are supplied with a wedge to overcome the tolerances in the plastic pipes
- Its thin wall construction will not disturb the flow characteristics of the medium
- On request possibility of Insert in stainless steel AISI 316L
- Consult our technical services for other dimension.



Fucoli-Somepal
FUNDIÇÃO DE FERRO, S.A.

Visit our website at www.fucoli-somepal.pt


Head office: Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198

Branch office: Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | comercial@fucoli-somepal.pt

STAINLESS STEEL INSERT FOR PE PIPES

63 - 500

15.400

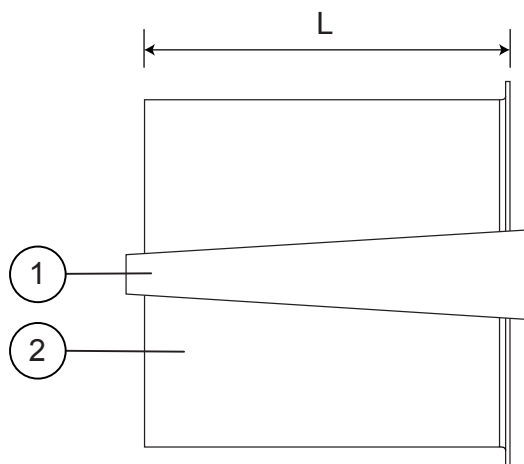

Component list

pos.	components	material	standard
1	Wedge	Stainless steel AISI 304	EN 10088-1
2	Insert	Stainless steel AISI 304	EN 10088-1

Reference and dimensions

code	PE ø ext.	SDR	PE thickness	L mm
10801400	63	17.6	3.6	175
10801402	63	11	5.8 / 5.1	175
10801404	63	7.4	8.6	175
10801406	75	17.6	4.3	175
10801408	75	11	6.8 / 6.5	175
10801410	75	7.4	10.3	175
10801412	90	41	2.7 / 2.2	175
10801414	90	17 / 17.6	5.4 / 5.1	175
10801416	90	11	8.2 / 7.8	175
10801418	90	7	12.3	175
10801420	110	17 / 17.6	6.6 / 6.3	175
10801422	110	11	10.0 / 9.5	175
10801424	110	7.4	15.1	175
10801426	125	41	3.7 / 3.1	175
10801428	125	17 / 17.6	7.4 / 7.1	175
10801430	125	11	11.4	175
10801432	140	17.6	8	175
10801434	140	11	12.8	175
10801436	160	41	4.5	200
10801438	160	17 / 17.6	9.5 / 9.1	200
10801440	160	11	14.6	200
10801442	180	17 / 17.6	10.7 / 10.2	200
10801444	180	11	16.4	200
10801446	200	17 / 17.6	11.9 / 11.4	200
10801448	200	11	18.2	200
10801450	225	41	6.3 / 5.5	225
10801452	225	17 / 17.6	13.4 / 12.8	225
10801454	225	11	20.2 / 20.5	225

code	PE ø ext.	SDR	PE thickness	L mm
10801456	250	17 / 17.6	14.8 / 14.2	225
10801458	250	11	22.7	225
10801459	250	26	9.6	225
10801460	280	33	8.7	225
10801462	280	17 / 17.6	16.6 / 15.9	225
10801464	280	11	25.4	225
10801466	315	33	9.2	225
10801468	315	26	12.4	225
10801470	315	17.6	17.9	225
10801472	315	17	18.7	225
10801471	315	11	28.6	225
10801474	355	17.6	20.1	225
10801476	355	11	32.3	225
10801478	355	10	35.0	225
10801480	355	9	40.0	225
10801482	400	34	11.7	225
10801484	400	26	15.3	225
10801485	400	21	19.1	225
10801488	400	17 / 17.6	22.7 / 23.7	225
10801489	500	26	19.1	225
10801491	500	21	23.9	225
10801492	500	17.6	28.3	225
10801494	500	17	30.0	225



Fucoli-Somepal
FUNDAÇÃO DE FERRO, S. R. L.

Visit our website at www.fucoli-somepal.pt

Head office: Estrada de Coselhas, 3000-125 Coimbra – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 239 490198

Branch office: Rua de Aveiro 50, 3050-420 Pampilhosa – Portugal | Tel.: (+351) 239 490100 | Fax: (+351) 231 949292 | comercial@fucoli-somepal.pt



100% MADE IN EUROPE
Ed.8 Rev. 2